

8525 / EN3646 Range & Extension



Standard Version

Nickel, Black anodised (non conductive plating)

Derivated Version

Olive green & Yellow cadmium, Passivated (stainless steel)

Features & Benefits

In accordance with:
HE302 / NAS1599 / ASN-E / EN3646


Space saving

MIL-C-26482 Serie 2

8525 / EN3646 Range



Intermateable & interchangeable

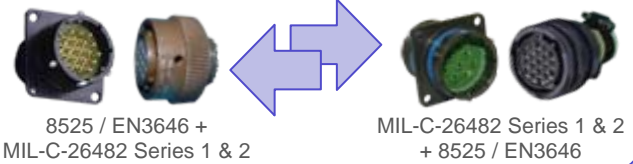

Hermetic Version



Stainless steel, Passivated
Hermeticity: $7.7 \cdot 10^{-7}$ Atm cm³/s

Shunted Version

NEW



Standard shell EN3646
Available: 16-26; 14-19; 10-06

Straight Spill Version

NEW



Standard version
Potted version
Hermeticity: $1 \cdot 10^{-7}$ Atm cm³/s

Fuel Tank Version



Spec: 053 Spec: 022
Immersion inside kerosene (JP5)

High Speed Version

NEW



Qualified ABS1054 ABS1057
Souriau's Quadrax connector system performs at Ethernet Full Duplex 100 Mbps
Meets the IEEE 802.3 100 Base TX standard



RJ45 / USB
Electrical: 10 Base T, 100 Base TX, 1000 Base T
Cat 5e/6 Per TIA/EIA 568A/B

Applications

